

MOD. 120/220 Contenitori in 3 pezzi

CON VALVOLA BY-PASS
ICORPORATA A 3 POSIZIONI

mod. 120

Valvola di sfogo pressione in plastica/Plastic pressure relief valve/Purge pression en plastique/Plastik-Auslassventil

Ref.	Ingressi/Inlet/Entrées/Anschlüsse	Diam./Ø	Vaso/Bowl/Bol/Behälter
120	Inseriti ottone/Brass inserts/Inserts laiton/Messing-Anschlüsse	3/4" - 1" (BSP)	9,3/4"/SAN-PC-PP
120	Inseriti ottone/Brass inserts/Inserts laiton/Messing-Anschlüsse	3/4" - 1" (BSP)	20"/SAN-PC-PP


mod. 220

Valvola di sfogo pressione in plastica/Plastic pressure relief valve/Purge pression en plastique/Plastik-Auslassventil

Ref.	Ingressi/Inlet/Entrées/Anschlüsse	Diam./Ø	Vaso/Bowl/Bol/Behälter
220	Plastica/Plastic/Plastique/Plastik	3/4" - 1" (NPT)	9,3/4"/SAN-PC-PP
220	Plastica/Plastic/Plastique/Plastik	3/4" - 1" (NPT)	20"/SAN-PC-PP

Dati tecnici/Technical data/Données techniques/Technische Angaben

Testa/Head/Tête/Kopf	Polipropilene talco/Talc polypropylene/Polypropylène talc/Talk Polypropylen
Selettore By-pass/By-pass selector/Sélecteur by-pass/"By-pass"-Wähler	P.O.M.
Copri-selettore/Selector cover/Couvercle Sélecteur/Wählerdeckel	Poliamide/Polyamide/Polyamide/Polyamid
Ghiera/Ring-nut/Bague/Nutmutter	Polipropilene talco/Talc polypropylene/Polypropylène talc/Talk Polypropylen
Vaso/Bowl/Bol/Behälter	SAN-PC Trasparente/Clear transparent/Transparent/durchsichtig PP Opaco bianco/White opaque/Blanc opaque/weiß undurchsichtig
O-ring	NBR
Pressione max. d'esercizio/Max. working pressure/Pression max. en service/Max. Betriebsdruck	8,6 bar (125 psi)
Temperatura max. servizio continuo/Max. temperature continuous service/ Temperature max. en service continu/Max. Temperatur beim Dauerbetrieb	40° C
Temperatura max. di punta/Peak temperature/Temperature max. de pointe/Max. Spitztemperatur	60° C

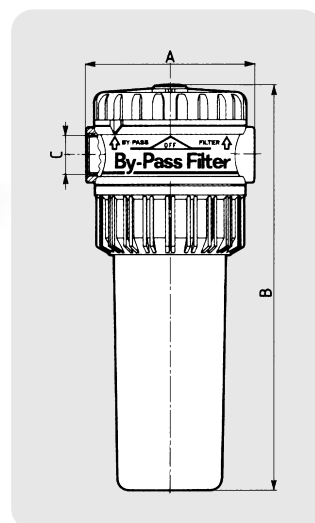

Mod.	A mm	B mm	C BSP-NPT	Imballo - Packing		
				No.	kg	m ³
120 - 9 3/4"	140	339	3/4" - 1"	12	16	0.104
120 - 20"	140	615	3/4" - 1"	1	2	0.014
220 - 9 3/4"	140	339	3/4" - 1"	12	15.2	0.104
220 - 20"	140	615	3/4" - 1"	1	1.9	0.014

Indice

